


DISCHARGE HOSE DH-15

Description

The gas cylinders are connected to the manifold (in the case of manifold cylinders systems) or directly to the discharge pipe (in the case of modular cylinder) via hoses. This allows for quick and convenient connection of the cylinders on both the time of the assembly and in maintenance or recharging without disassembling the entire pipes network and bottles.

One end is connected to the outlet of the cylinder valve and the other end to the check valve mounted to the manifold in the manifold cylinders and of modular cylinder discharge pipe connection. The connection at both ends is performed by rotating nuts that allows quick and efficient threading.

This allows containers off for maintenance or recharge without dismantling other system elements such as joints, pipes, etc...

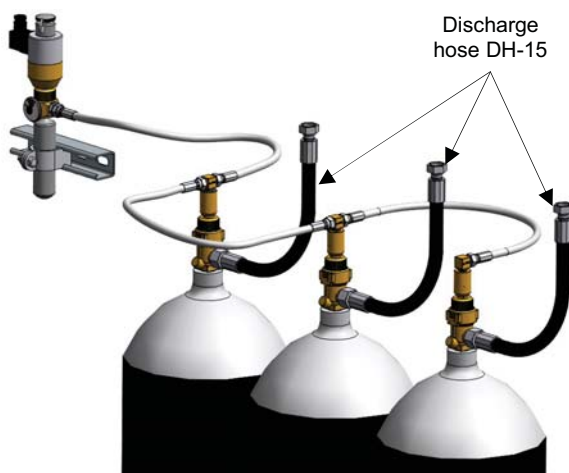

Technical information

Discharge hose DH-15	
Connections	Bi-chrome tempered steel
Flexible conduct	Synthetic rubber
Connection thread to the container valve	W21.7x1/14" F revolving
Connection thread to the check valve VALAN-15CO and VALAN-15CO-VF	1/2" BSP F revolving
Min. Curvature radius	3.15 in (80 mm)
Max. Inclination angle	82.5° length 9.84 in (250 mm)
Length	9.84/ 11.81/ 15.75/ 19.69/ 27.56/ 33.46/ 39.47/ 49.21/ 59.06/ 78.74 In (250 / 300 / 400 / 500 / 700 / 850 / 1000 / 1250 / 1500 / 2000 mm)
Approvals	UL-EX16320 FM-3054767

WARNING: This type of Discharge hose DH-15 is manufactured and approved to be used in fixed extinguishing installations with CO₂ Gas. This product is not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 S.L. is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.